

PHOTOMETRICS REPORT

# ROGUE



# Table of Contents

<b>1. Testing Process</b> .....	1
<b>2. Photometric Report</b> .....	2
<b>Full Spot – Full Power</b> .....	2
Report Summary .....	2
Overall Measurement .....	2
Beam Details .....	3
Polar Diagrams .....	4
<b>3. Chromaticity Report</b> .....	5
<b>Full Spot – Full Power</b> .....	5
Report Summary .....	5
Chromaticity .....	6
TM-30-18 Details .....	7
<b>4. Contact Us</b> .....	8

## Testing Process

### Total Illuminance Measurements

Illuminance is measured using the Viso Systems LabSpion<sup>®</sup>, which takes multiple measurements across a light beam to calculate the total delivered lumens, beam, and field of a product. These values can be described as the empirical output of the product as it projects from the lens or lenses. All photometric data contained in this report are obtained from the actual illuminance of the tested Chauvet light source and are never theoretical values derived from calculations.

### Testing Lab Equipment and Process

The Chauvet headquarters in Sunrise, Florida has a climate- and light-controlled photometric testing laboratory where Chauvet products are analyzed and photometric data are measured using the Viso Systems LabSpion<sup>®</sup> light measurement solution.

This system includes a spectrometer sensor, which measures the precise light and color output of the fixture, and a two-axis goniometer, which rotates the product to allow for multi-angle and multi-directional measurement. The Viso Light Inspector software then collects and summarizes the data. From the data gathered, the software can also measure the beam and field angles, accurate color temperature, color quality, and illuminance at multiple distances. The custom-built, Chauvet-specific template presents this information in the photometric and chromaticity reports that follow.

IES (Illuminating Engineering Society) files, an industry-standard file format, are also generated from each test for easy distribution of photometric data.

Several light meters are also used for specific products or to recheck for precision. Accuracy is verified using one or more of the devices listed below:

- Sekonic SpectroMaster C-700-U
- EXTECH HD450 Datalogging Heavy Duty Light Meter
- Asensetek Essence Lighting Passport

To ensure accurate measurements in every photometric or chromaticity test, Chauvet routinely calibrates the LabSpion<sup>®</sup> system every six months as recommended by Viso Systems.

# Photometric Report

Rogue R2X Spot Full Spot, Full Power

## Report Summary

### Output

Total Lumens: 14789 lm  
Peak Intensity: 235359 cd  
Illuminance @ 5m: 9344 lux  
Fixture Efficacy: 41 lm/W

### Optical

Horizontal Beam Angle (50%): 16°  
Vertical Beam Angle (50%): 16°  
Horizontal Field Angle (10%): 18°  
Vertical Field Angle (10%): 18°  
Horizontal Cutoff Angle (3%): 18.4°  
Vertical Cutoff Angle (3%): 18.4°




### Conditions

AC Supply: 118 V, 60 Hz  
Power: 362.9 W  
Current: 3.07 A  
Power Factor: 1.0


This data sheet conforms to American National Standard E1.9 – 2007 (R2017). All data was measured and calculated by a Viso Systems LabSpion Goniometer at the Chauvet PD Optics Laboratory in Sunrise, FL on 4/1/2020 to LM-63-2002 Standards.

## Overall Measurement


Angular Beam Distribution

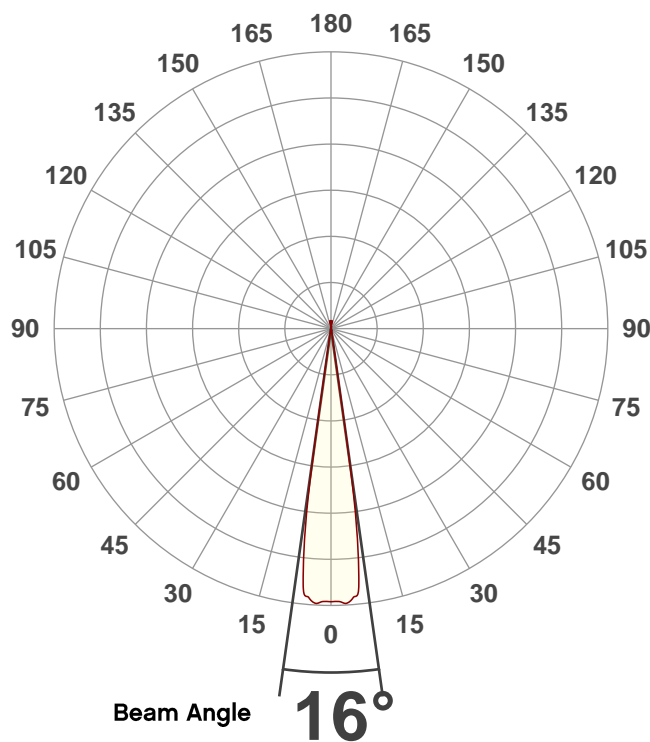

Spectral Distribution

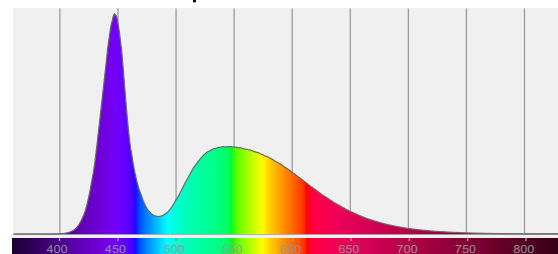


CIE 1931

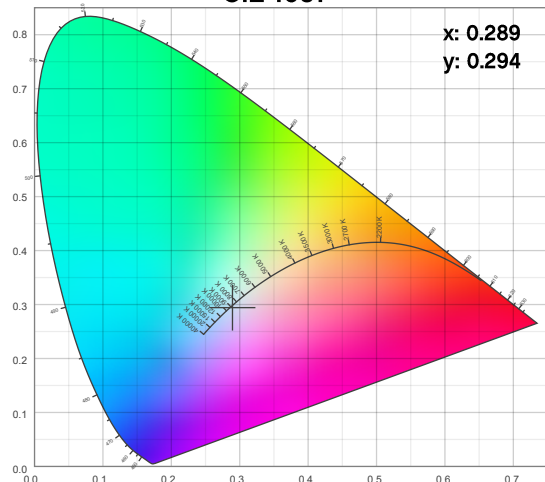

# Photometric Report

Rogue R2X Spot: Full Spot, Full Power

## Beam Details

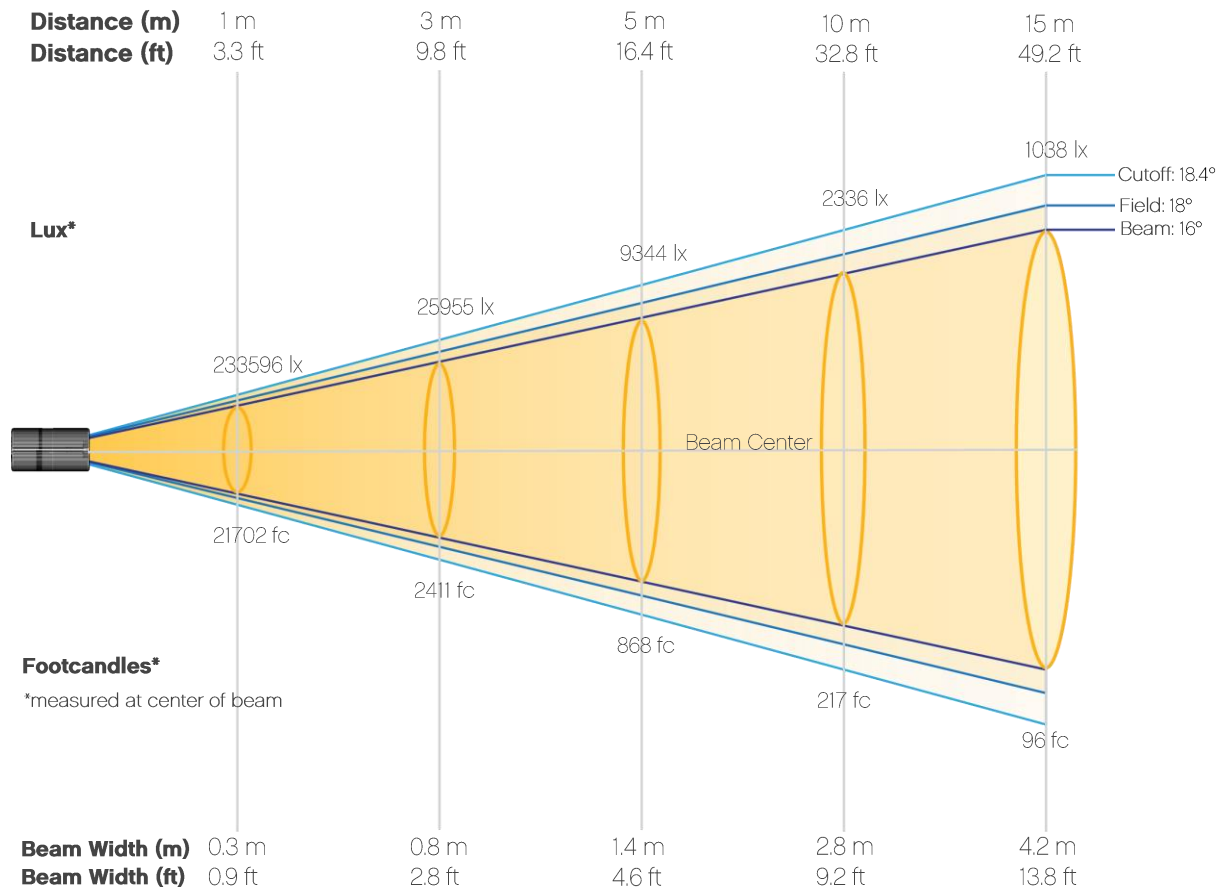


### Beam Illuminances from 1-20m (3.3-65.6ft)

<b>Distance</b>	<b>1m</b>	<b>2m</b>	<b>3m</b>	<b>4m</b>	<b>5m</b>	<b>6m</b>	<b>7m</b>	<b>8m</b>	<b>9m</b>	<b>10m</b>
Lux	233596	58399	25955	14600	9344	6489	4767	3650	2884	2336
<b>Distance</b>	<b>11m</b>	<b>12m</b>	<b>13m</b>	<b>14m</b>	<b>15m</b>	<b>16m</b>	<b>17m</b>	<b>18m</b>	<b>19m</b>	<b>20m</b>
Lux	1931	1622	1382	1192	1038	912	808	721	647	584
<b>Distance</b>	<b>3.3ft</b>	<b>6.6ft</b>	<b>9.8ft</b>	<b>13.1ft</b>	<b>16.4ft</b>	<b>19.7ft</b>	<b>23ft</b>	<b>26.2ft</b>	<b>29.5ft</b>	<b>32.8ft</b>
FC	21702	5425	2411	1356	868	603	443	339	268	217
<b>Distance</b>	<b>36.1ft</b>	<b>39.4ft</b>	<b>42.7ft</b>	<b>45.9ft</b>	<b>49.2ft</b>	<b>52.5ft</b>	<b>55.8ft</b>	<b>59.1ft</b>	<b>62.3ft</b>	<b>65.6ft</b>
FC	179	151	128	111	96	85	75	67	60	54


# Photometric Report

Rogue R2X Spot Full Spot, Full Power  
Candela Plot

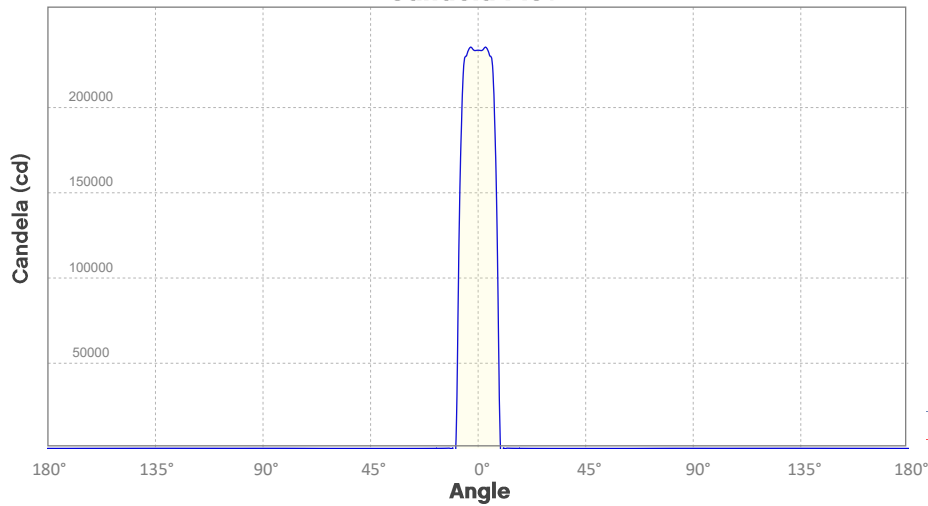

Beam Angle (50%): 16°  
Field Angle (10%): 18°  
Cutoff Angle (3%): 18.4°


## Polar Diagrams

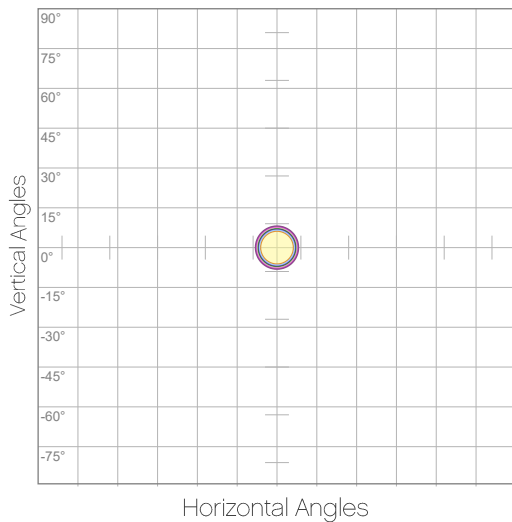

### iso-candela Diagram

10%	23360 cd
20%	46719 cd
30%	70079 cd
40%	93438 cd
50%	116798 cd
60%	140158 cd
70%	163517 cd
80%	186877 cd
90%	210236 cd

Conditions:  
Number of c-planes: 2  
Candela at center: 233596 cd

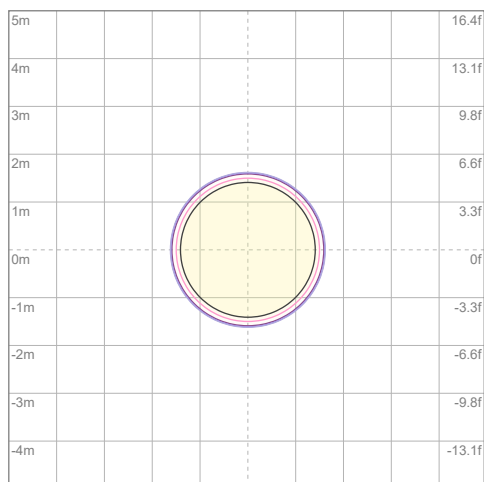

### iso-illuminance Diagram

3%	70.1 lx
5%	117 lx
10%	234 lx
30%	701 lx
50%	1168 lx

Conditions:  
Number of c-planes: 2  
Lux at center: 2336 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Mounting height: 10 meters / 33 feet

# Chromaticity Report

Rogue R2X Spot: Full Spot, Full Power

## Report Summary

### Measurements


Total Lumens: 14789 lm  
Peak Intensity: 235359 cd  
Fixture Efficacy: 41 lm/W

Correlated Color Temperature: 8831K  
 $\Delta uv$ : -0.0053

CRI: 71.7      CRI R9 Value: -16.8  
CQS: 68.2  
TLCI: 47  
TM-30-18 Rf: 66.0  
TM-30-18 Rg: 94.8  
1<sup>st</sup> Dominant Wavelength: 447 nm  
2<sup>nd</sup> Dominant Wavelength: 541 nm



### Spectral Distribution

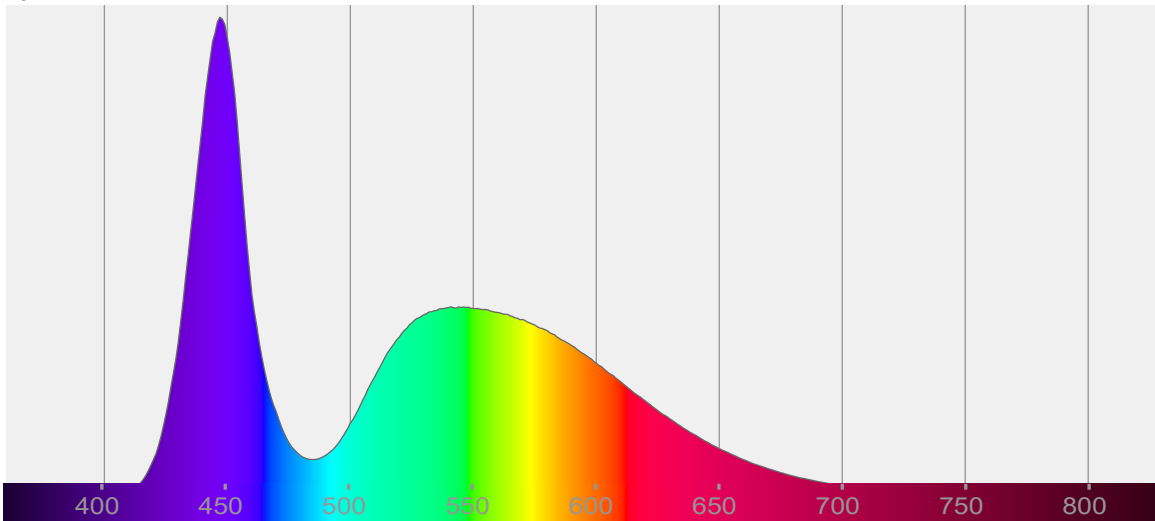

#### Tested Color

**8831 K**  
CIE 1931 Coordinates:  
X: 0.289    Y: 0.294

#### Color Temperature

8831 K

#### Light Quality

CRI: 71.7


#### Notes:

# Chromaticity Report


Rogue R2X Spot: Full Spot, Full Power

## Chromaticity


CIE 1931

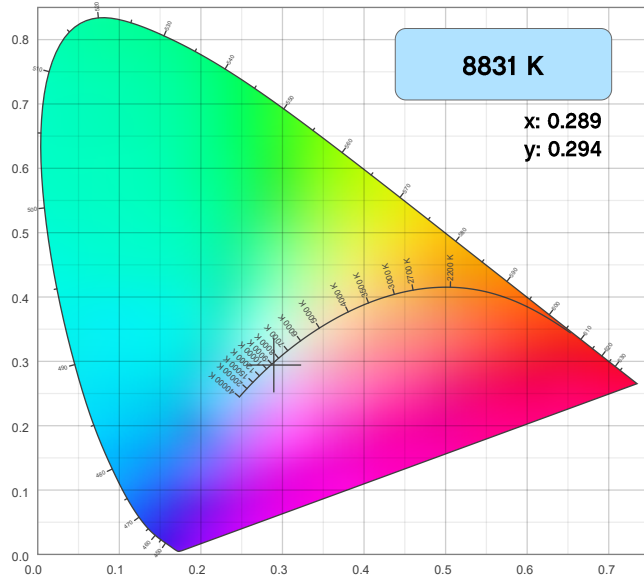


CIE 1931 - Zoom

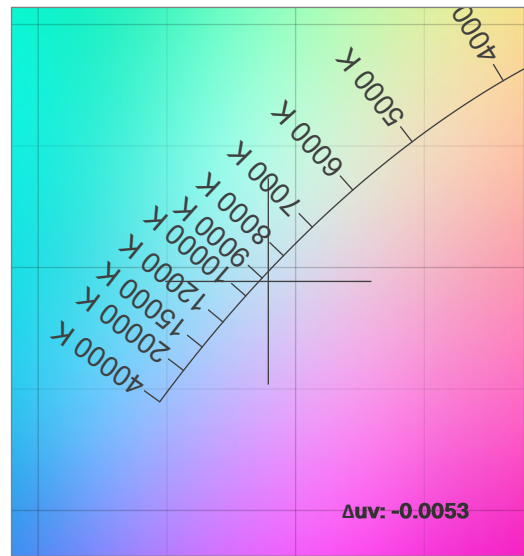

CRI: 71.7 (R1-R8)

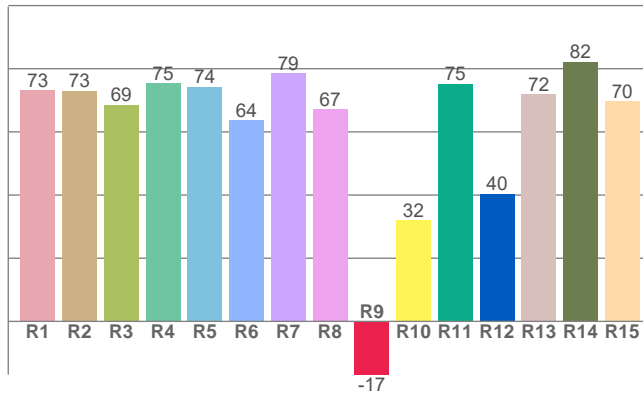

CQS: 68.2

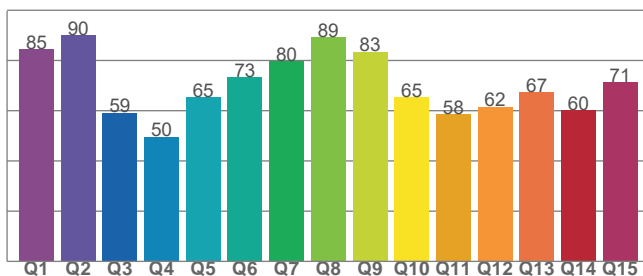

Color Parameters

Color Temperature	Color Coordinate CIE 1931	Color Coordinate CIE 1931
CCT	x	y
8831 K	0.289	0.294

Color Deviation from Black Body Curve	Color Coordinate CIE 1964	Color Coordinate CIE 1964
$\Delta_{uv}$	y	u
-0.0053	0.294	0.194

Color Rendering Index	Red Component	Color Quality Scale
CRI	CRI - R9	CQS
71.7	-16.8	68.2

Television Lighting Consistency Index	Color Fidelity	Color Gamut
TLCI	TM-30-18 - Rf	TM-30-18 Rg
47	66.0	94.8



# Chromaticity Report


Rogue R2X Spot: Full Spot, Full Power

## TM-30-18 Details


**Rf 66.0**  
Fidelity Index (R<sub>f</sub>)

**Rg 94.8**  
Gamut Index (R<sub>g</sub>)


Hue Bin	R <sub>f</sub>	Chroma Shift	Hue Shift
1	65	-17%	-4%
2	65	-14%	11%
3	54	-7%	23%
4	61	3%	23%
5	67	11%	14%
6	82	10%	0%
7	91	-1%	-5%
8	73	-13%	-5%
9	68	-22%	11%
10	53	-15%	29%
11	26	-4%	33%
12	63	7%	23%
13	73	15%	11%
14	73	13%	-7%
15	68	10%	-23%
16	76	-4%	-11%

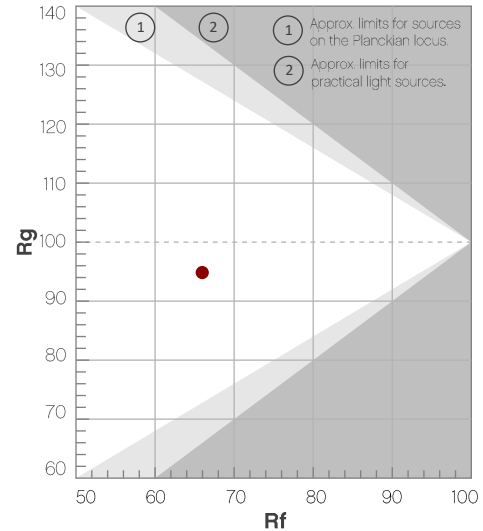


Color Vector Graphic




Color Distortion Graphic




R<sub>f</sub> by Hue Bin

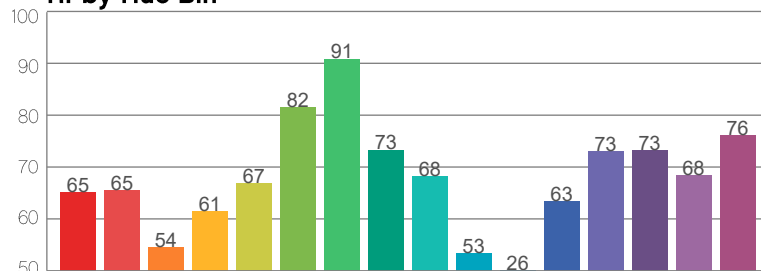

Local Chroma Shift by Hue Bin

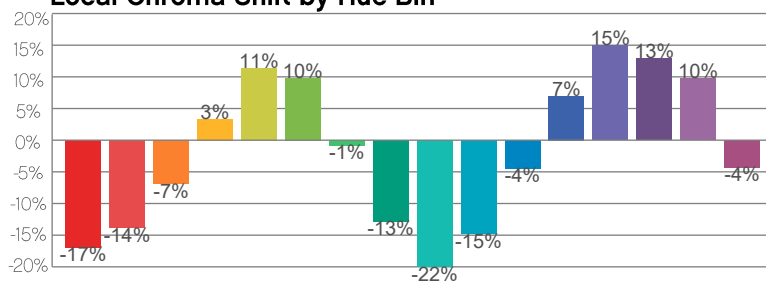

Color Sample Fidelity

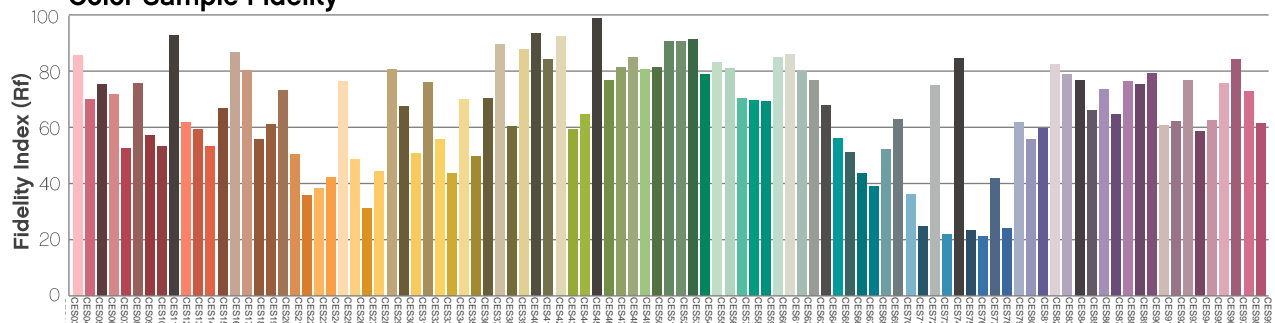

## Contact Us

General Information	Technical Support
<b>Chauvet World Headquarters</b>	
5200 NW 108 <sup>th</sup> Ave. Sunrise, FL 33351 Voice: (954) 577-4455 Fax: (954) 929-5560 Toll Free: (800) 762-1084	Voice: (844) 393-7575 Fax: (954) 756-8015 Email: <a href="mailto:chauvetcs@chauvetlighting.com">chauvetcs@chauvetlighting.com</a> Website: <a href="http://www.chauvetprofessional.com">www.chauvetprofessional.com</a>
<b>Chauvet Europe Ltd</b>	
Unit 1C Brookhill Road Industrial Estate Pinxton, Nottingham, UK NG16 6NT Voice: +44 (0) 1773 511115 Fax: +44 (0) 1773 511110	Email: <a href="mailto:UKtech@chauvetlighting.eu">UKtech@chauvetlighting.eu</a> Website: <a href="http://www.chauvetprofessional.eu">www.chauvetprofessional.eu</a>
<b>Chauvet Europe BVBA</b>	
Stokstraat 18 9770 Kruishoutem, Belgium Voice: +32 (9) 388 93 97	Email: <a href="mailto:BNLtech@chauvetlighting.eu">BNLtech@chauvetlighting.eu</a> Website: <a href="http://www.chauvetprofessional.eu">www.chauvetprofessional.eu</a>
<b>Chauvet France</b>	
3, Rue Ampère 91380 Chilly-Mazarin, France Voice: +33 1 78 85 33 59	Email: <a href="mailto:FRtech@chauvetlighting.fr">FRtech@chauvetlighting.fr</a> Website: <a href="http://www.chauvetprofessional.eu">www.chauvetprofessional.eu</a>
<b>Chauvet Germany</b>	
Bruno-Bürgel-Str. 11 28759 Bremen, Germany Voice: +49 421 62 60 20	Email: <a href="mailto:DEtech@chauvetlighting.de">DEtech@chauvetlighting.de</a> Website: <a href="http://www.chauvetprofessional.eu">www.chauvetprofessional.eu</a>
<b>Chauvet Mexico</b>	
Av. de las Partidas 34 - 3B (Entrance by Calle 2) Zona Industrial Lerma Lerma, Edo. de México, CP 52000 Voice: +52 (728) 690-2010	Email: <a href="mailto:servicio@chauvetlighting.de">servicio@chauvetlighting.de</a> Website: <a href="http://www.chauvetprofessional.eu">www.chauvetprofessional.eu</a>

Visit the applicable website above to verify our contact information and instructions to request support. Outside the U.S., U.K., Ireland, Benelux, France, Germany, or Mexico, contact the dealer of the record.